


**The assembling position of rating and symbol should be upside-down.**

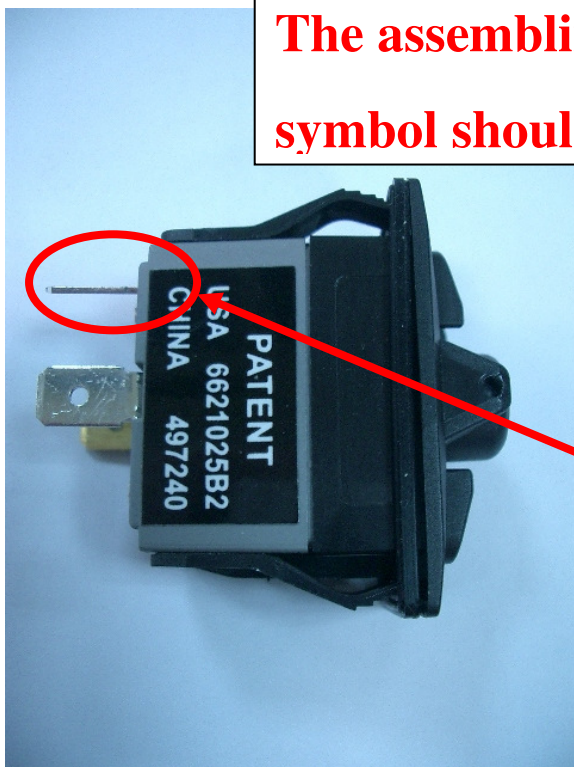

OFF  
(amber light)

ON  
(red light)